


CHANGING PLACES
CARE ENVIRONMENTS
HYGIENE ROOMS

 care
spaces
by Wealden Rehab

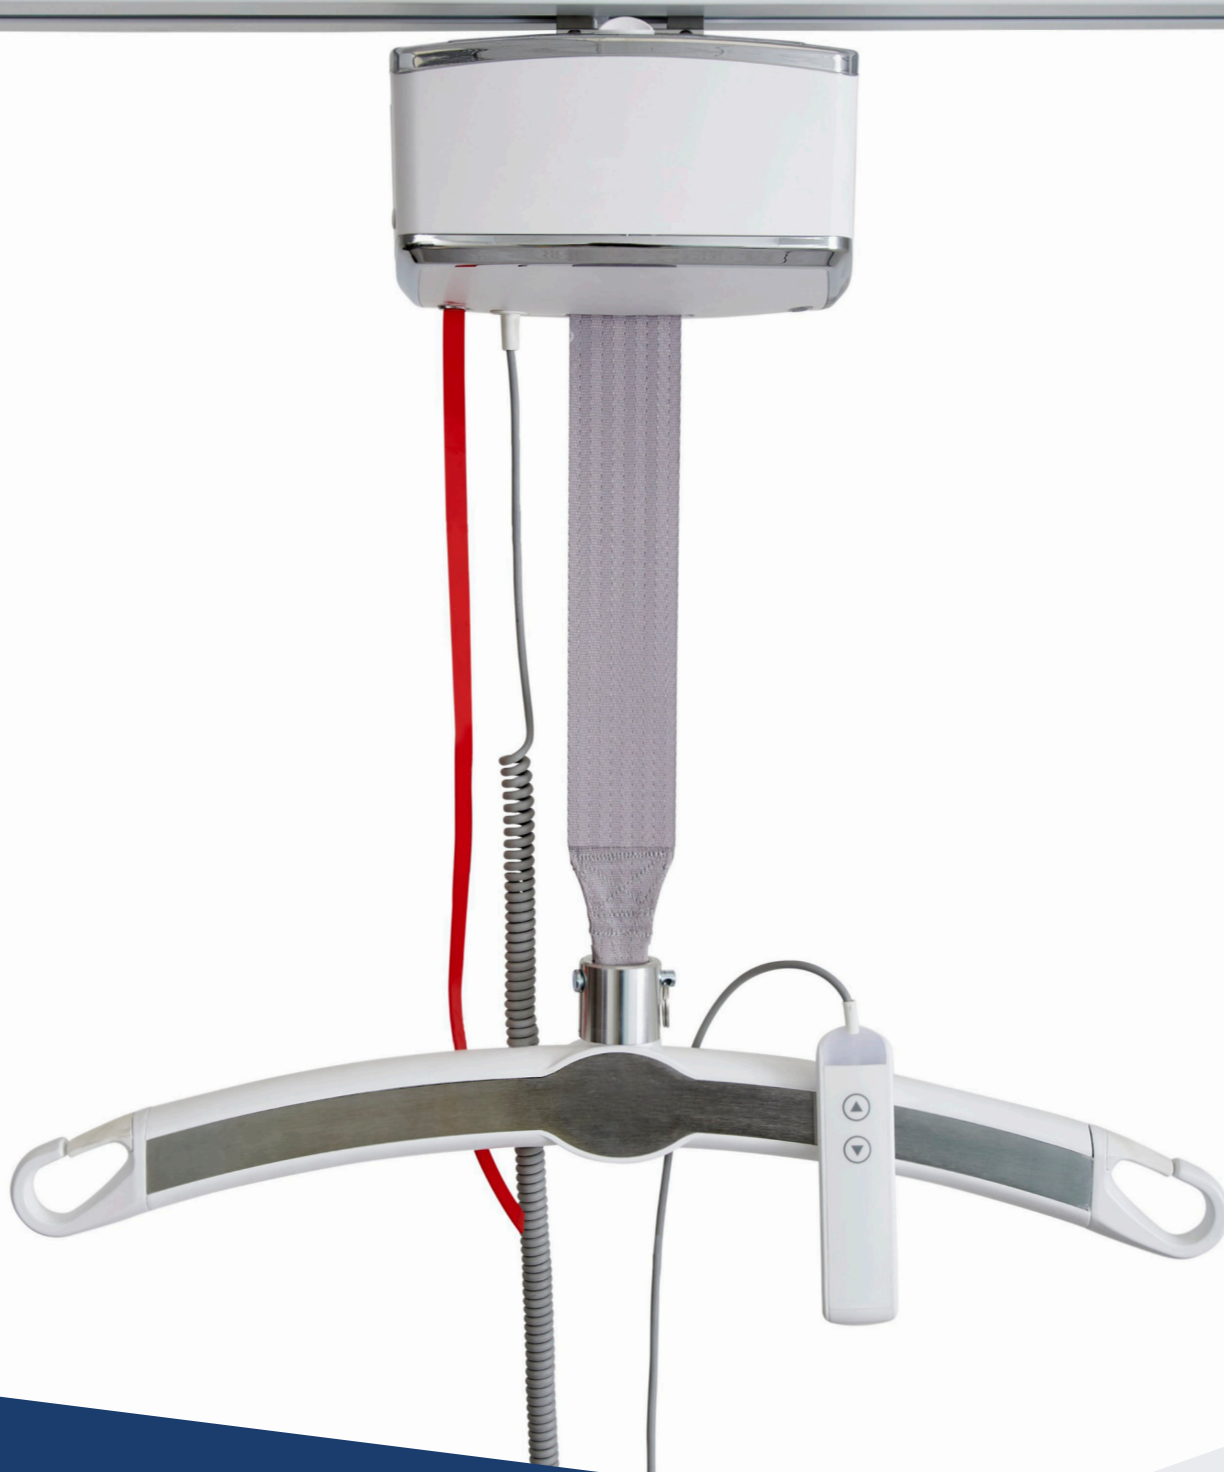

The world's
smallest
patient lift

GoLift

GoLift is an ideal ceiling lift system designed for routine transfers of patients





It is aesthetically pleasing and is the most compact ceiling lift in its class

State-of-the-art lifting

GoLift boasts state-of-the-art battery technology coupled with all metal gears that allows the caregiver to safely, and effortlessly, transfer a patient weighing up to 318kg on a single lift. For larger patients, combine two compact GoLift 700 systems to obtain a lifting capacity of 454kg.

Ready to lift in any installation

Our modular track system gives you flexibility to suit the needs of any working environment. Depending on how the hoist is to be used, we are able to design and fit straight, curved and XY (full room coverage) track configurations.



Its functional design is suited to everyday use



Functional design

The smooth edges and rounded corners of GoLift and its accessories are not only aesthetically pleasing but help address infection control requirements.

Light but safe

GoLift only weighs 4.6kg which makes it both safe and easy to use. Its functional design gives quick access for battery changes and makes servicing and maintenance simple.



GoLift has many class leading features

Quick release track attachment

Achieve instant electrical and mechanical connection

Quick change battery design

GoLift weighs just 4.6kg

Lifts up to 50st!

Durable metal gears

Bright LED indicators


Constructed of solid steel

Quick magnetic hand control connection

Emergency lowering/stop feature


Capacitive touch hand control

Rubber emergency strap for easy cleaning

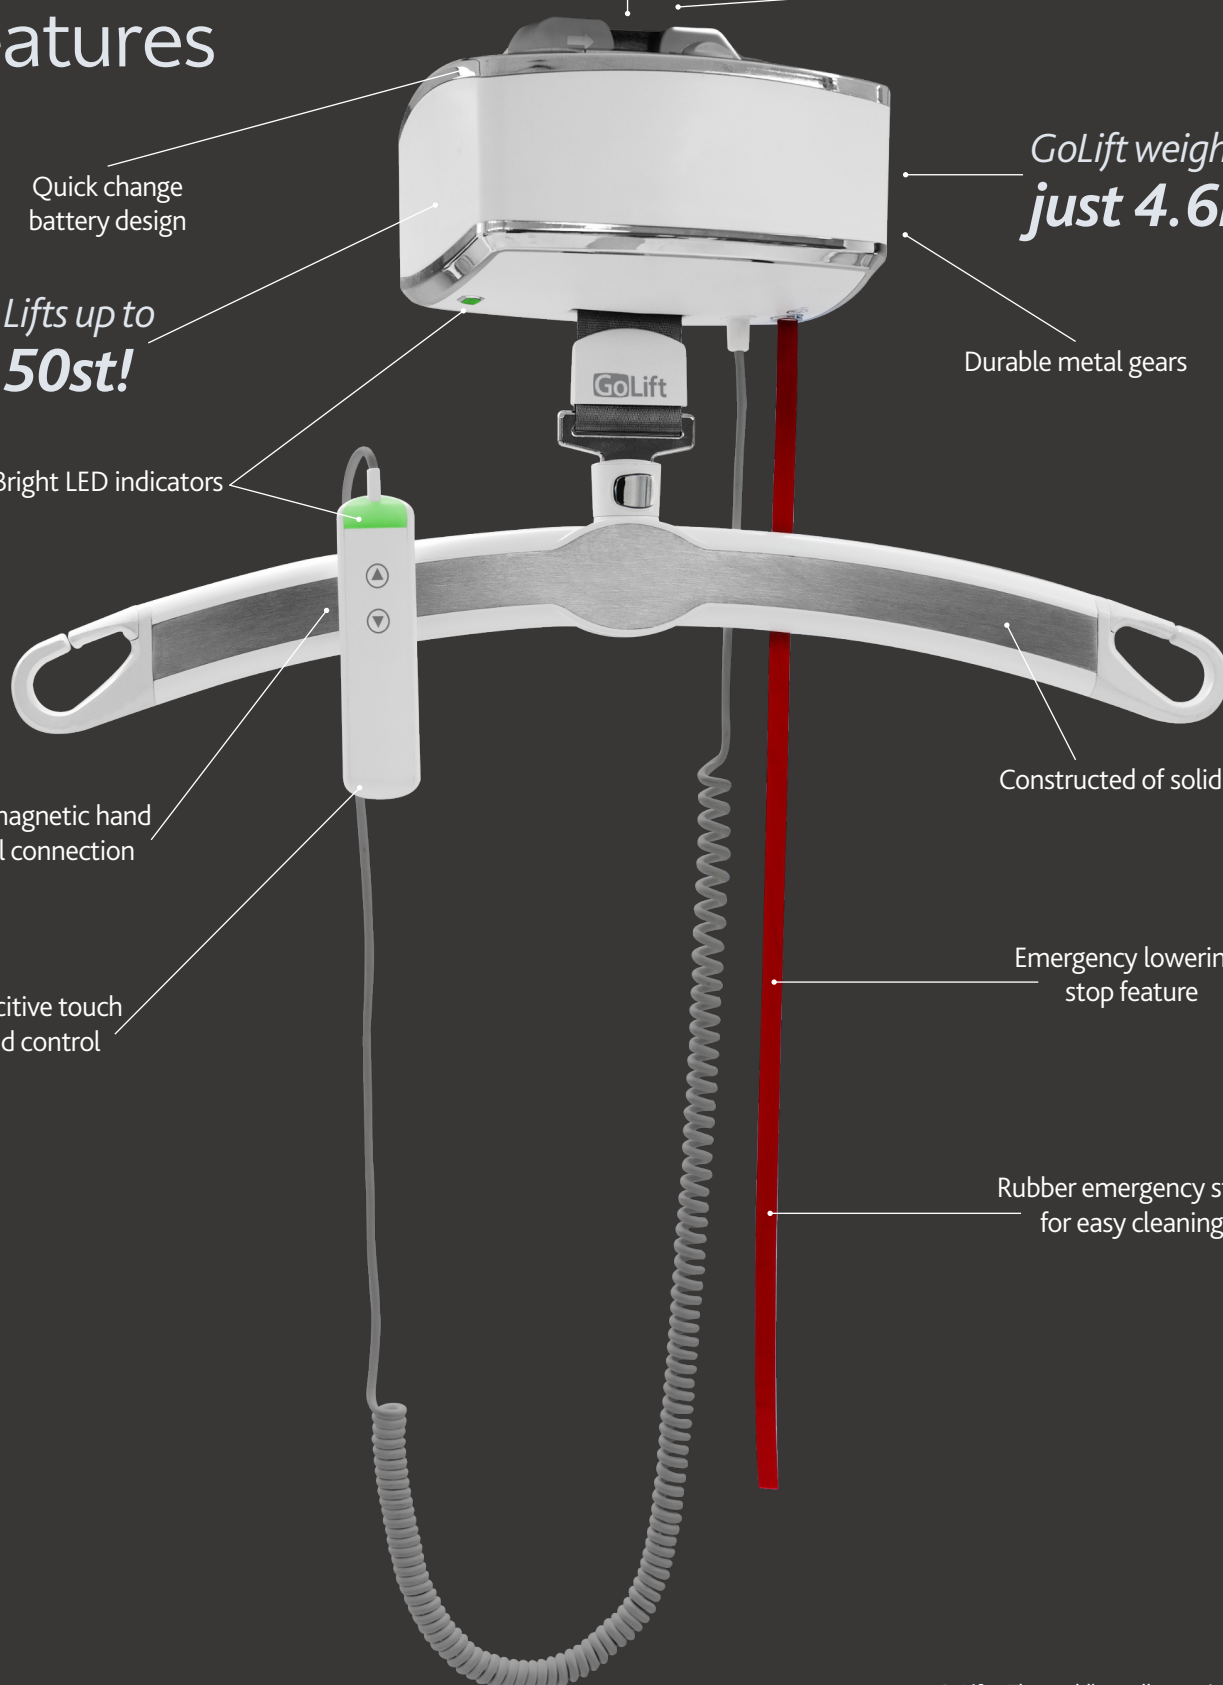

GoLift on our regular track is ideal for rooms with low ceilings

There are three GoLift track profiles

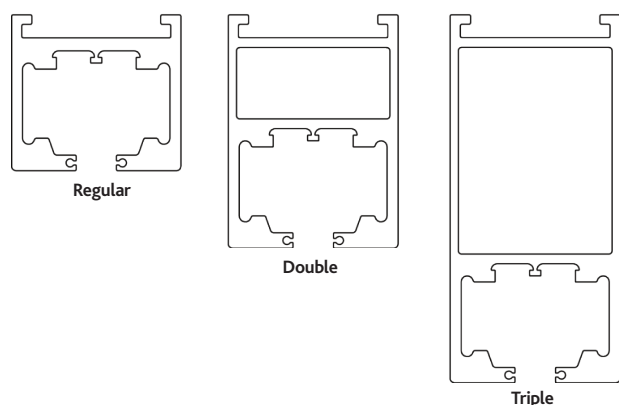

Track configurations

Straight Track

Curved Track

Full Room Coverage (X/Y or H Systems)

Optional recessed, flush mount track systems

All GoTrack Systems feature

Low weight and high capacity

Fast and flexible installation

Hidden End Stops for safety

Anywhere/Continuous charge


Description	Part Number	Length x Width x Height	Track Weight per m
Regular	TRK-REG-96	2440 x 67 x 60 mm	3.77kg
Regular	TRK-REG-120	3050 x 67 x 60 mm	3.77kg
Regular	TRK-REG-240	6100 x 67 x 60 mm	3.77kg
Double	TRK-DBL-120	3050 x 67 x 90 mm	4.72kg
Double	TRK-DBL-150	3800 x 67 x 90 mm	4.72kg
Double	TRK-DBL-240	6100 x 67 x 90 mm	4.72kg
Triple	TRK-TRP-120	3050 x 67 x 146 mm	5.65kg
Triple	TRK-TRP-240	6100 x 67 x 146 mm	5.65kg
Custom	Custom lengths in any track type available upon request		

GoLift accessories




Patient Scale

This patient weigh scale has a compact design that helps to measure the user's weight. It can be easily attached to the GoLift lift tape using the quick release system which allows the spreader bar to be reconnected beneath the scale. Class III - Displays units in kg, 400 kg capacity, 2014/31/EU - CE conformity

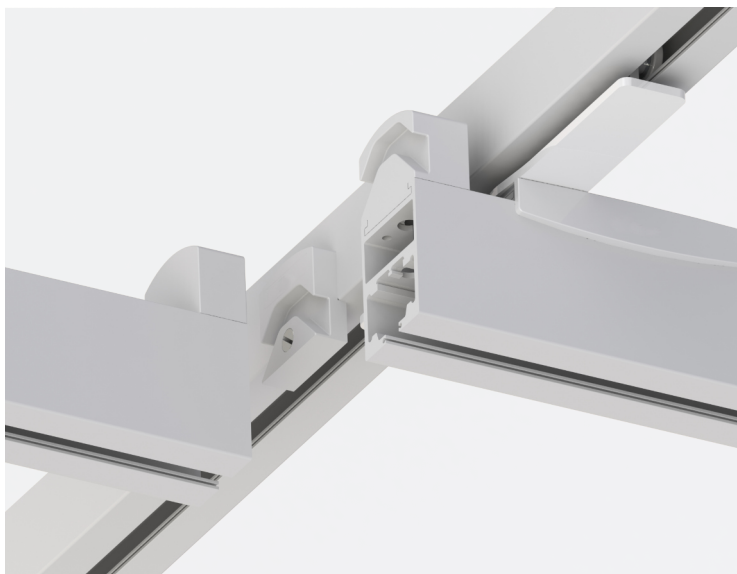


MagnAlign Transition Gate

Our magnetic transition gates fit between an XY track system and a straight rail to create seamless movements for the GoLift hoist to pass safely between the two tracks. Using a series of magnets, the MagnAlign gate quickly aligns the tracks with minimal noise and fuss. The safety pins in the gate system prevent the hoist from running out of the open end of the track whilst the tracks are not aligned.

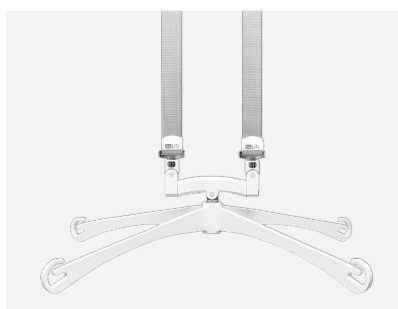


4 Point Carry Bar

The 4-point carry bar is a mounting solution with wider support points catering to bariatric users. The bar has a unified design for easy cleaning and infection control measures.

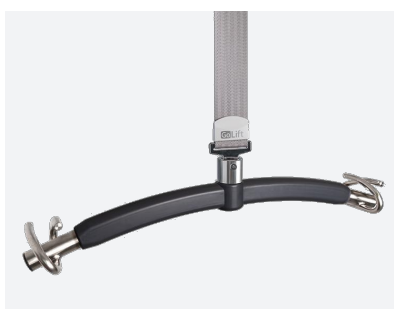

4 Hook Carry Bar

This 4-hook carry bar increases the adjustability of the sling loop connection points, ensuring the user gets the most comfortable lift.

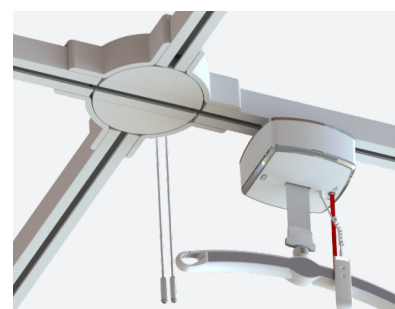

Turntable

It is suitable for installation where junctions are required in a track or when a track turn is required. Providing ultimate flexibility in lift and transfer situations that demand a wide range of locations. Available in manual or powered versions.

Specifications and Listings

GoLift Weight Capacities

GO-LIFT-400	Single Lift	Lift Up to 28st / 181kg
GO-LIFT-450	Single Lift	Lift Up to 32st / 205kg
GO-LIFT-700	Single Lift	Lift Up to 50st / 318kg
GO-LIFT-1000	Tandem Lifts	Lift Up to 72st / 454kg



Safe Working Load (SWL)

28st / 181kg
32st / 205kg
50st / 318kg
72st / 454kg

Dimensions

28, 32 & 50st / 181, 205 & 318kg:

Length: 197 mm
Width: 197 mm
Height: 108 mm
Strap Length: 2134 mm

72st / 454kg:

Length: 394 mm
Width: 197 mm
Height: 108 mm
Strap Length: 2134 mm

Unit Weight

28st / 181kg version: 4kg
32st / 205kg version: 5kg
50st / 318kg version: 5kg
72st / 454kg version: 9kg
(Tandem Lifts)

Safety

Emergency Stop
Emergency Lowering Device
Upper Limit Detection
Lower Limit Detection
Slack Tape Sensor
Free Fall Brake
(over speed governor)
Low Battery and
Dead Battery Alarms
Soft Start and Stop
Overload Protection
Emergency Manual Lowering

Approvals

Certified to:
Can/CSA-C22.2 No 60601-1:08,
UL 60601-1:08
Tested to: ISO 10535-06, CE

Hand Control

Capacitive Touch
Protection Class: IPX0

Lift Case

Flame retardant ABS

Maximum Sound Level

<55 dB

Maximum Lifting Speed

No load: 50mm/second
11st / 68kg: 33mm/second
28st / 181kg: 25mm/second
50st / 318kg: 25mm/second
72st / 454kg: 25mm/second

Batteries

High Capacity, Nickel Metal
Hydride (Ni-Mh)
Standard: 2 x 14.4V (3.3Ah)
Optional: 2 x 14.4V (5Ah)

Battery Charger

100-240 VAC 40 Watt

Charging time

2 – 4 hours

Number of Lifts per Charge (Duty: 10/90)

25% of strap at midrange
(calculated using 5Ah Packs)
375 with 13st / 84kg
170 with 28st/ 181kg
102 with 50st / 318kg

Service Life

10 years or 22,500 cycles

GoLift

Discover GoLift today

Speak to a **Care Spaces** expert on 01634 949988,
email carespaces@wealdenrehab.com or visit carespaces.co.uk